


IPsec中継: IPv4 over IPv6

回線速度: 1Gbps、双方向フロー印加

暗号化の条件: AES-256/SHA-1

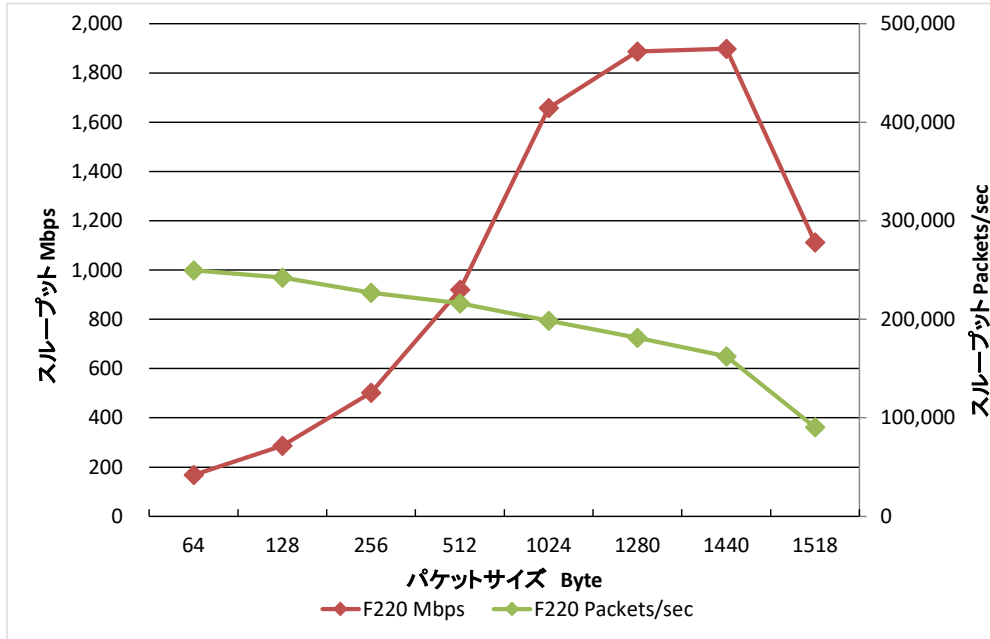


	測定フレームサイズ (bytes) ※最小値: 64bytes、フラグメント前の最大値: 1440bytes							
	64	128	256	512	1024	1280	1440	1518
Packets/sec	249,776.4	242,289.8	227,128.8	216,401.0	198,580.6	181,426.2	162,546.2	90,394.8
Mbps	167.8	286.9	501.5	921.0	1,658.5	1,886.8	1,898.5	1,112.2

EtherIP over IPsec中継: Ethernet over IPv4 over IPv6

回線速度: 1Gbps、双方向フロー印加

暗号化の条件: AES-256/SHA-1

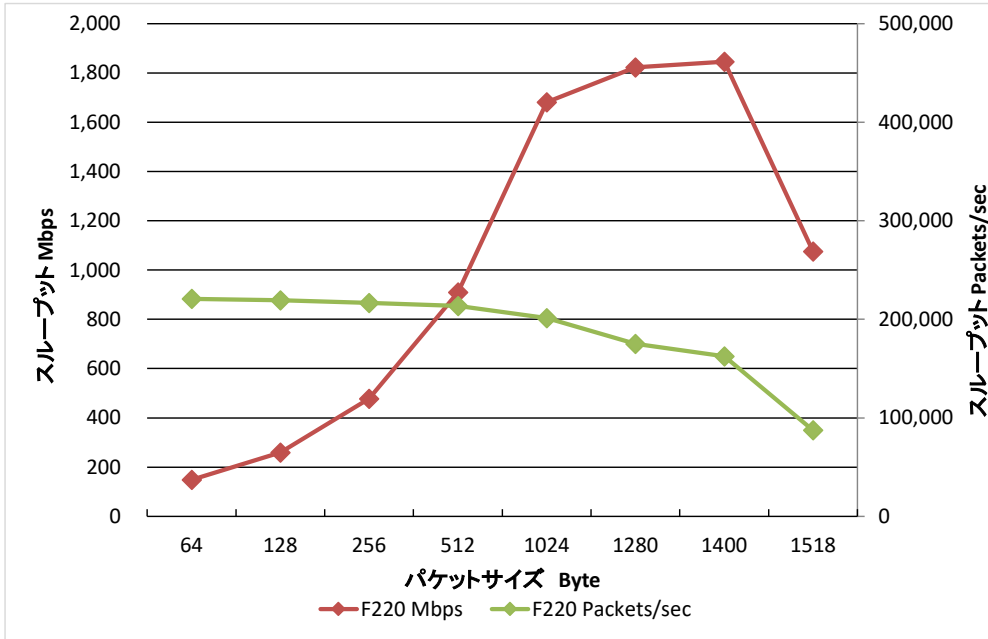



	測定フレームサイズ (bytes)							
	64	128	256	512	1024	1280	1400	1518
Packets/sec	220,741.0	219,218.6	216,524.6	213,650.2	201,384.0	175,235.0	162,487.6	87,381.8
Mbps	148.3	259.6	478.1	909.3	1,682.0	1,822.4	1,845.9	1,075.1

※最小値: 64bytes、フラグメント前の最大値: 1400bytes

L2TPv3 over IPsec中継: Ethernet over IPv4 over IPv6

回線速度: 1Gbps、双方向フロー印加

暗号化の条件: AES-256/SHA-1

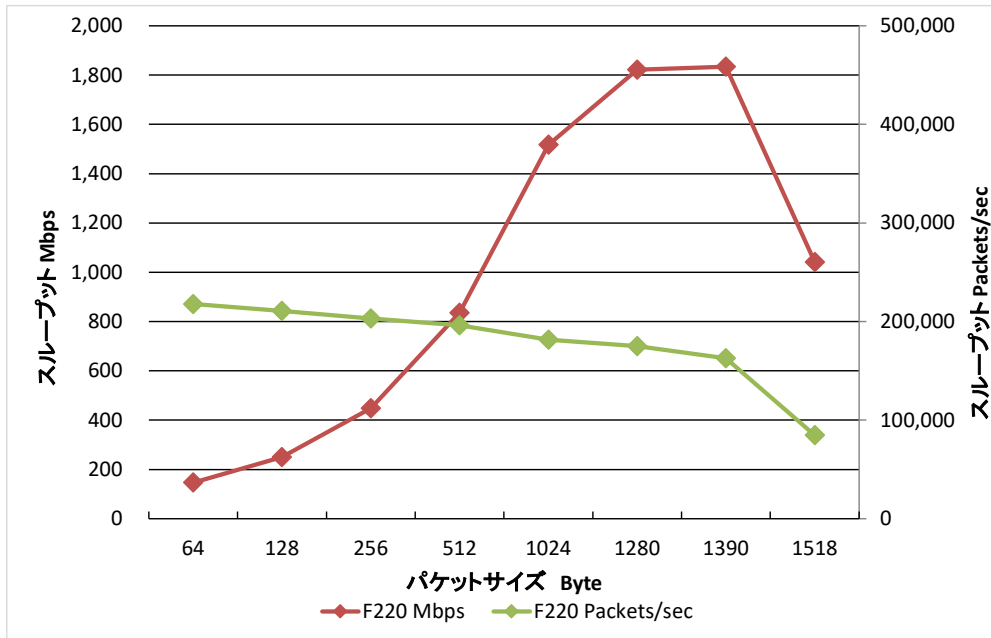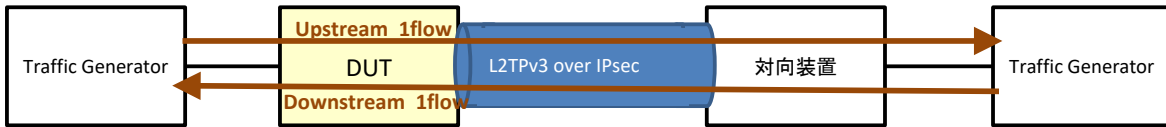

	測定フレームサイズ (bytes)							
	※最小値: 64bytes、フラグメント前の最大値: 1390bytes							
	64	128	256	512	1024	1280	1390	1518
Packets/sec	217,837.4	210,978.8	203,269.2	196,229.0	181,760.2	175,235.0	162,602.0	84,686.0
Mbps	146.4	249.8	448.8	835.2	1,518.1	1,822.4	1,834.2	1,042.0