


We can.

Optical Receiver

FH-OR-0521N

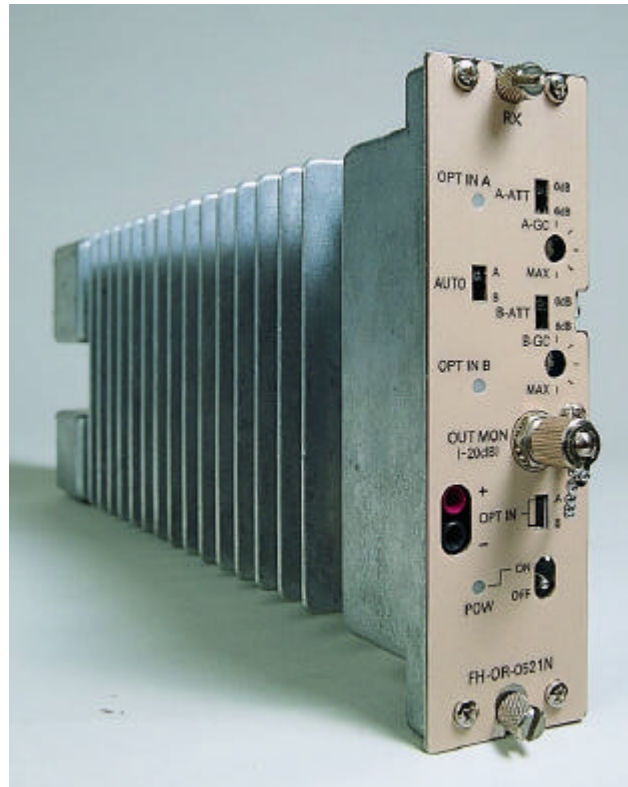

Feature

Frequency length:70 ~ 770MHz

by Direct Modulation

Max 8 Transmitter on sub-rack(FH-MF-1013A)

Include automatic RF-SW and two receiver

仕 様

| Item | Specification |
|-------------------------------|---|
| Frequency range | 10 ~ 55MHz |
| RF output level | 85dB μ \pm 1dB(4output)/93dB μ \pm 1dB (1output) (include RF-SW loss) |
| Impedance | 75 Ω / F (female) |
| Transmission capacity | NTSC :4 ch |
| Type of transmitter | PN-LD |
| Wave length | 1310nm/ 1550nm |
| Fiber | SMF 10/ 125 μ m |
| Optical connector | SC-APC/SC-SPC |
| Number of optical input | 2port (Main-RX + Sub-RX) |
| Optical input power | 0dBm ~ -8dBm |
| Number of output port | 4port/ 1port |
| RF Adjustment range(variable) | 0 ~ -18dB |
| RF Adjustment range(SW) | 0/ -6dB |
| Monitor level | -20dB \pm 1dB |
| Frequency flatness | \pm 1dB |
| Return loss(RF) | 14dB |
| CNR(*1) | 47dB |
| CSO(*1) | -55dB |
| CTB(*1) | -60dB |
| Operating voltage | DC 24V \pm 5% |
| Operating current | 260mA |
| Operating temp | 0 ~ 40 |
| Dimension | 44.5 (W) \times 149.0 (H) \times 351.9 (D) mm |
| Mass | 1.8kg |



安全に関するご注意

商品を安全にお使いいただくために、ご使用前に必ず「取扱説明書」をよくお読みください。

このカタログに記載の商品に関するお問い合わせは下記までお願いいたします。仕様および外観は、改良のため予告なく変更される事がありますので、あらかじめご了承ください。カタログと実際の色とは印刷の関係で、多少異なる場合があります。

古河電気工業株式会社 情報通信カンパニー ブロードバンド製品部 <http://www.furukawa.co.jp>

技術ユニット 〒100-8322 東京都千代田区丸の内2-6-1 (03)3286-3145