

Aerial Closure J396L3

The J396L3 closure is for aerial application which accommodates 1 main cable, 2 distribution cable, and 16 drop cable entry on one side. Various cable type entries allow ease of FTTx network construction.




Features and Benefits

- Small size and light weight
- Up to 240 fiber splicing (Max. 400 fiber splicing)
- Suitable for FTTx construction
- Ease of installation
- Able to place closure over the installed cable
- Wide wiring space allows ease of operation

Specification

Item		Specification		Remark	
Product name		J396L3			
Product No.		J396L3 <P04><SP0>	J396L3 <P06><SP0>		
Dimension (H×W×L mm)		110×110×860		—	
Weight (kg)		2.0		—	
Water proof		IPX4		—	
Environmental condition		Temperature: -20 to +60°C Humidity: 0 to 100%RH		—	
Max. cable entry	Main cable	φ 8-24 mm	1 cable/side	—	
	Distribution cable	φ 8-18 mm	2 cables/side	—	
	Drop cable		16 cables/side	Max. 2.5×4.2 mm	
Max. fiber splices	Single fiber		60	100	20 splices/tray
	2-fiber ribbon		120	200	20 splices/tray
	4-fiber ribbon		240	400	20 splices/tray
	8-fiber ribbon		240	400	10 splices/tray
Applicable splitter		1×4, 1×8		—	

Installation

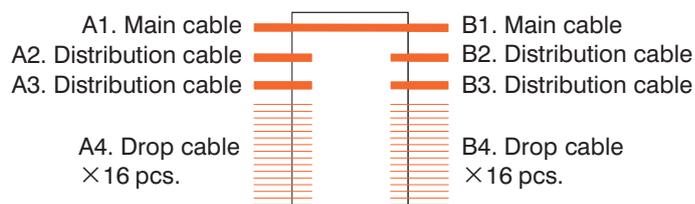

Position	Applicable cable type	Position	Applicable cable type
A1	Main cable	B1	Main cable
A2	Distribution cable	B2	Distribution cable
A3	Distribution cable	B3	Distribution cable
A4	Drop cable×16	B4	Drop cable×16