



IPsec中継: IPv4 over IPv4
回線速度: 1Gbps、双方向フロー印加
暗号化の条件: AES-256/SHA-1

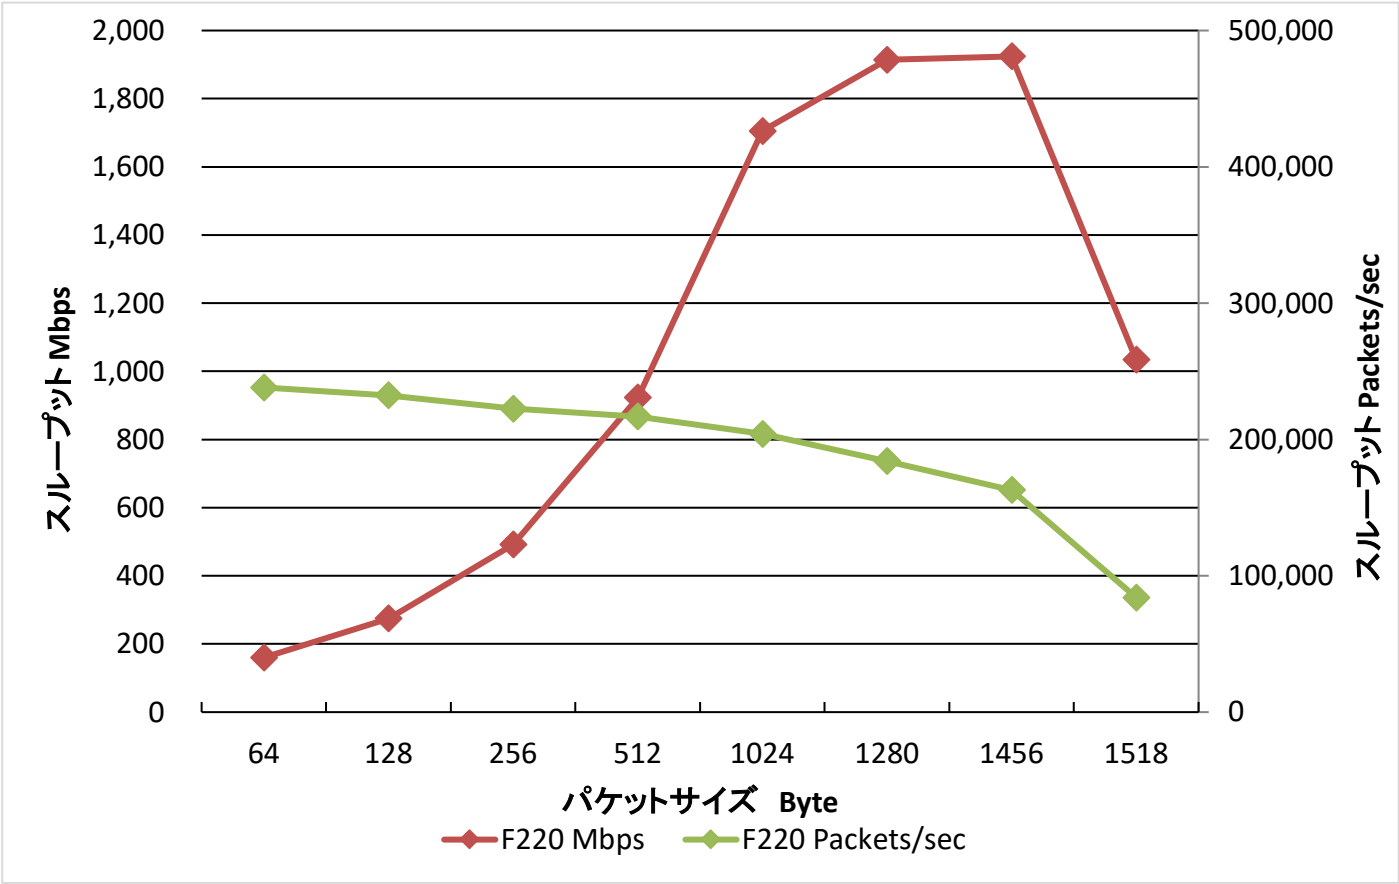

	測定フレームサイズ (bytes) ※最小値: 64bytes、フラグメント前の最大値: 1456bytes							
	64	128	256	512	1024	1280	1456	1518
Packets/sec	238,162.2	232,402.2	222,710.2	216,859.4	204,187.4	184,052.8	162,932.4	84,051.6
Mbps	160.0	275.2	491.7	923.0	1,705.4	1,914.1	1,923.9	1,034.2


IPinIP over IPsec中継:IPv4 over IPv4 over IPv4

回線速度:1Gbps、双方向フロー印加
暗号化の条件:AES-256/SHA-1

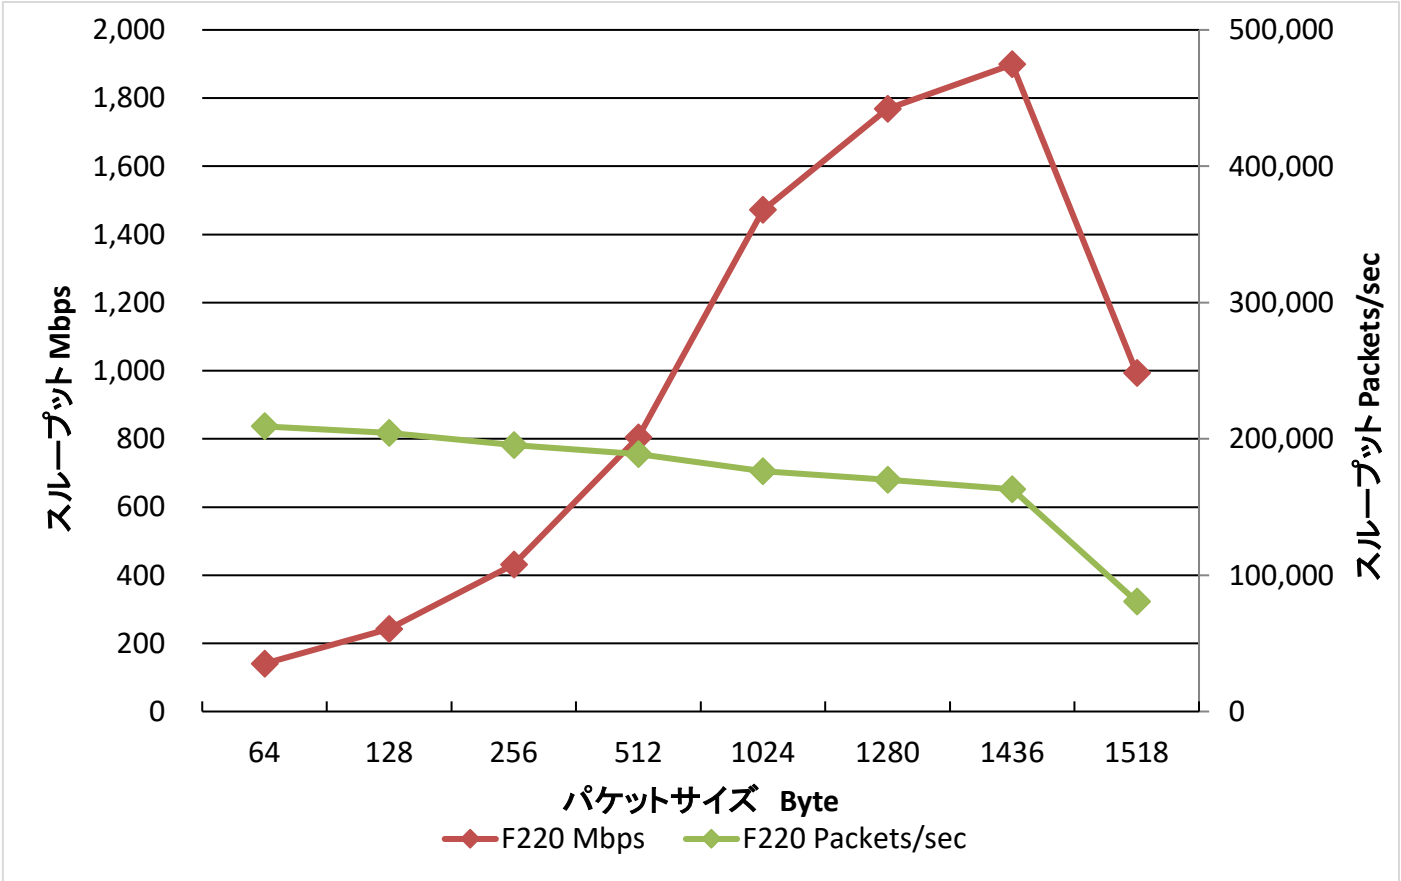

	測定フレームサイズ (bytes) ※最小値: 64bytes、フラグメント前の最大値: 1436bytes							
	64	128	256	512	1024	1280	1436	1518
Packets/sec	209,126.8	204,387.0	195,316.2	188,893.8	176,153.4	169,981.8	162,992.8	80,721.4
Mbps	140.5	242.0	431.3	803.9	1,471.2	1,767.8	1,898.5	993.2


EtherIP over IPsec中継: Ethernet over IPv4 over IPv4
回線速度: 1Gbps、双方向フロー印加
暗号化の条件: AES-256/SHA-1

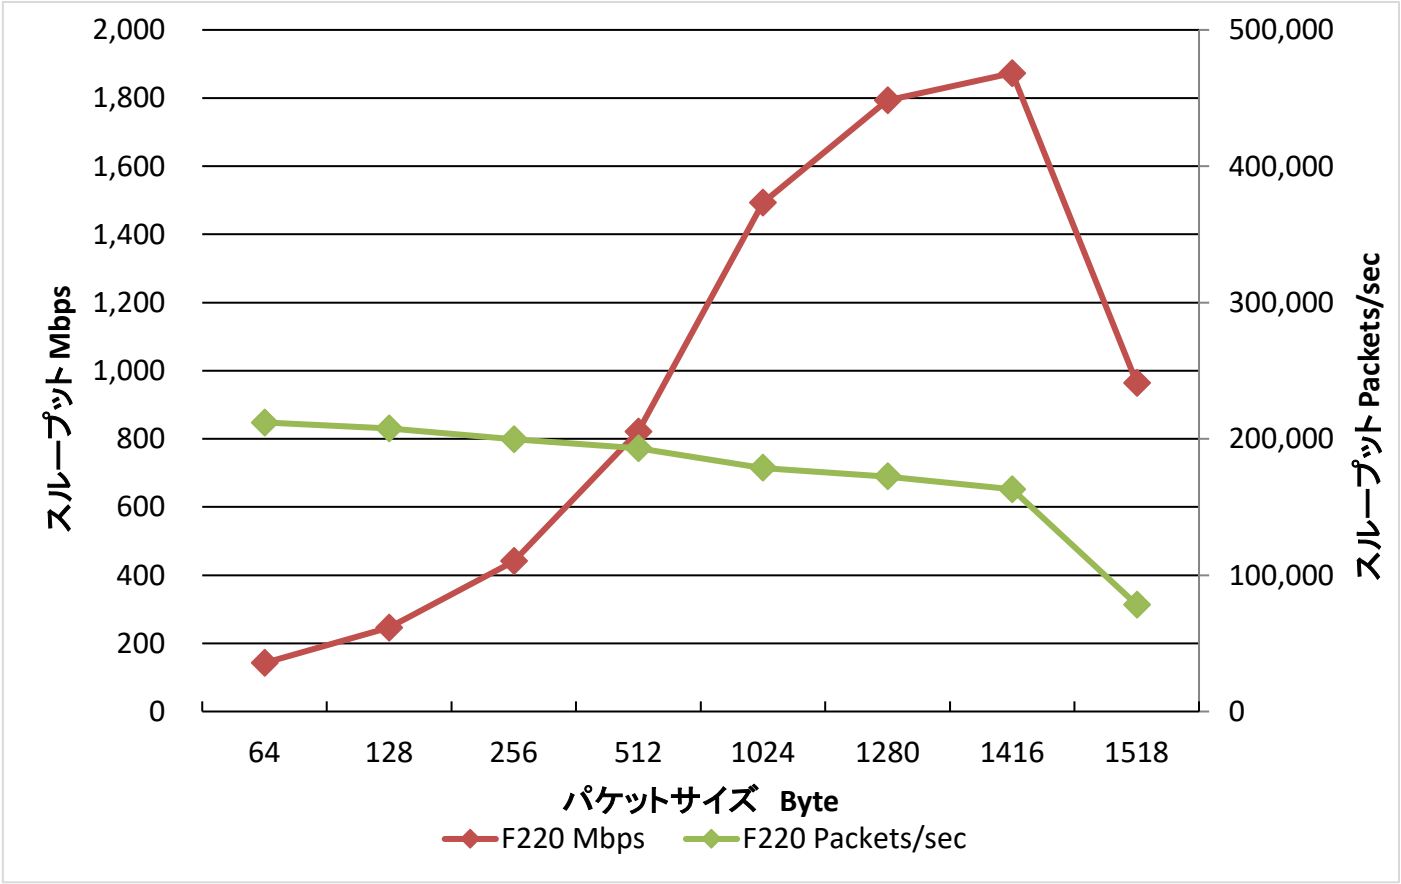

	測定フレームサイズ (bytes) ※最小値: 64bytes、フラグメント前の最大値: 1416bytes							
	64	128	256	512	1024	1280	1416	1518
Packets/sec	212,030.4	207,683.0	199,734.6	193,019.8	178,723.2	172,420.8	163,055.0	78,342.8
Mbps	142.5	245.9	441.0	821.5	1,492.7	1,793.2	1,873.2	963.9

L2TPv3 over IPsec中継: Ethernet over IPv4 over IPv4

回線速度: 1Gbps、双方向フロー印加
暗号化の条件: AES-256/SHA-1

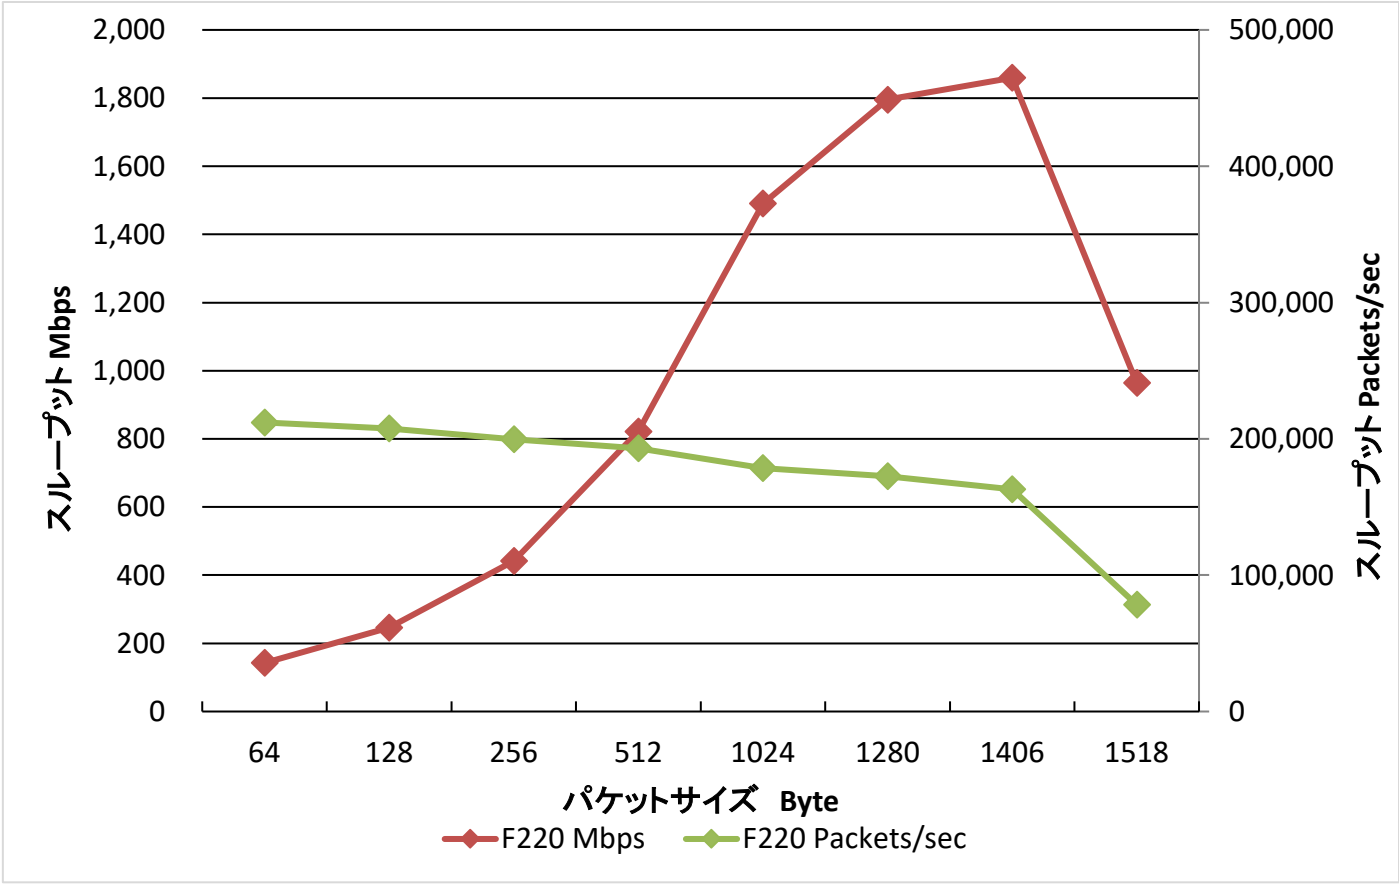

	測定フレームサイズ (bytes) ※最小値: 64bytes、フラグメント前の最大値: 1406bytes							
	64	128	256	512	1024	1280	1406	1518
Packets/sec	212,030.4	207,683.0	199,734.6	193,019.8	178,489.6	172,608.4	163,001.2	78,342.8
Mbps	142.5	245.9	441.0	821.5	1,490.7	1,795.1	1,859.5	963.9