



IPsec中継:IPv4 over IPv6
回線速度:1Gbps、双方向フロー印加
暗号化の条件:AES-256/SHA-1

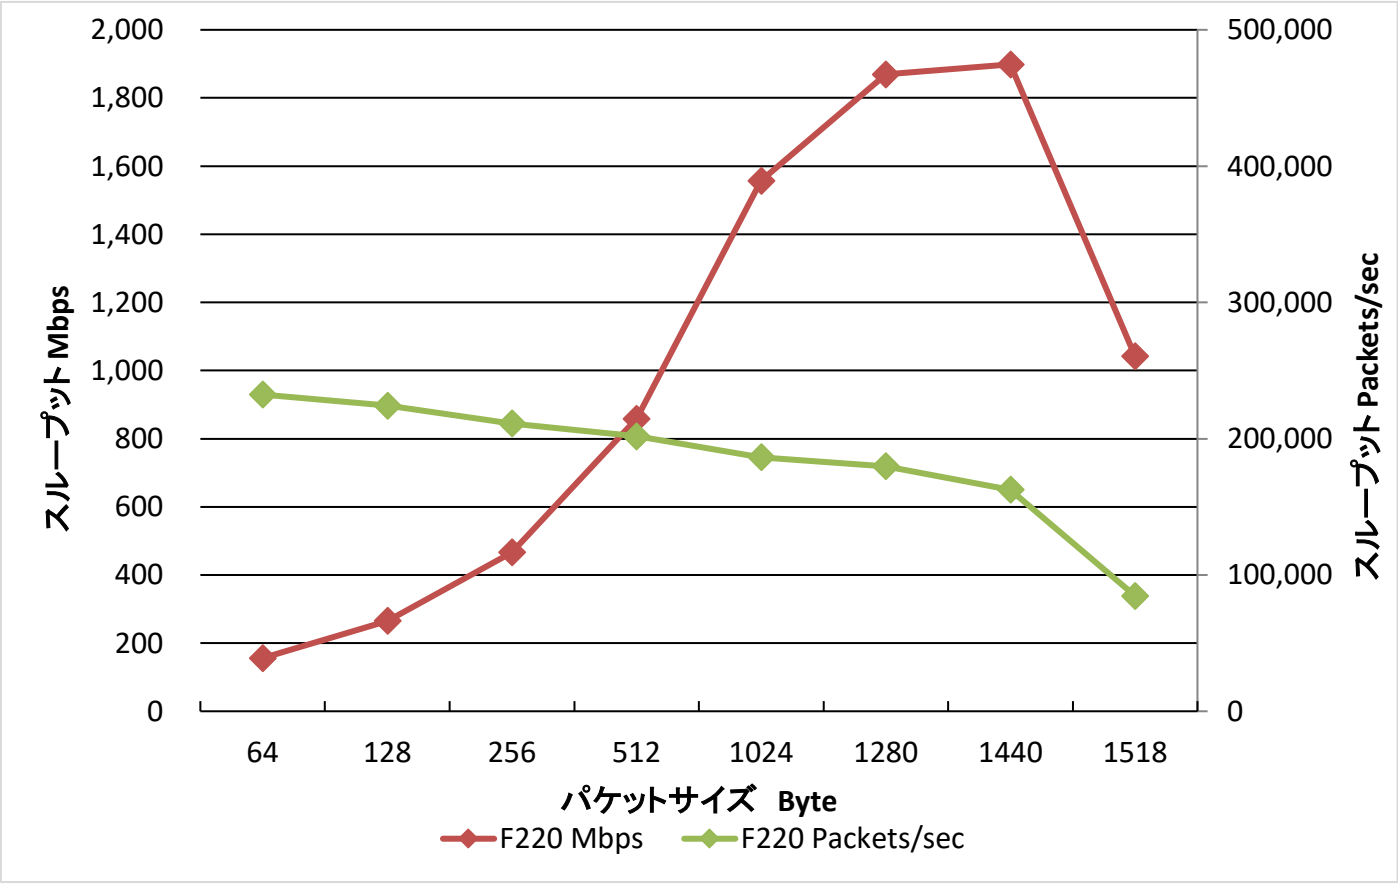

	測定フレームサイズ (bytes) ※最小値: 64bytes、フラグメント前の最大値: 1440bytes							
	64	128	256	512	1024	1280	1440	1518
Packets/sec	232,355.2	224,162.4	211,222.4	201,730.4	186,432.6	179,737.8	162,546.2	84,686.0
Mbps	156.1	265.4	466.4	858.6	1,557.1	1,869.3	1,898.5	1,042.0

EtherIP over IPsec中継: Ethernet over IPv4 over IPv6


回線速度: 1Gbps、双方向フロー印加
暗号化の条件: AES-256/SHA-1

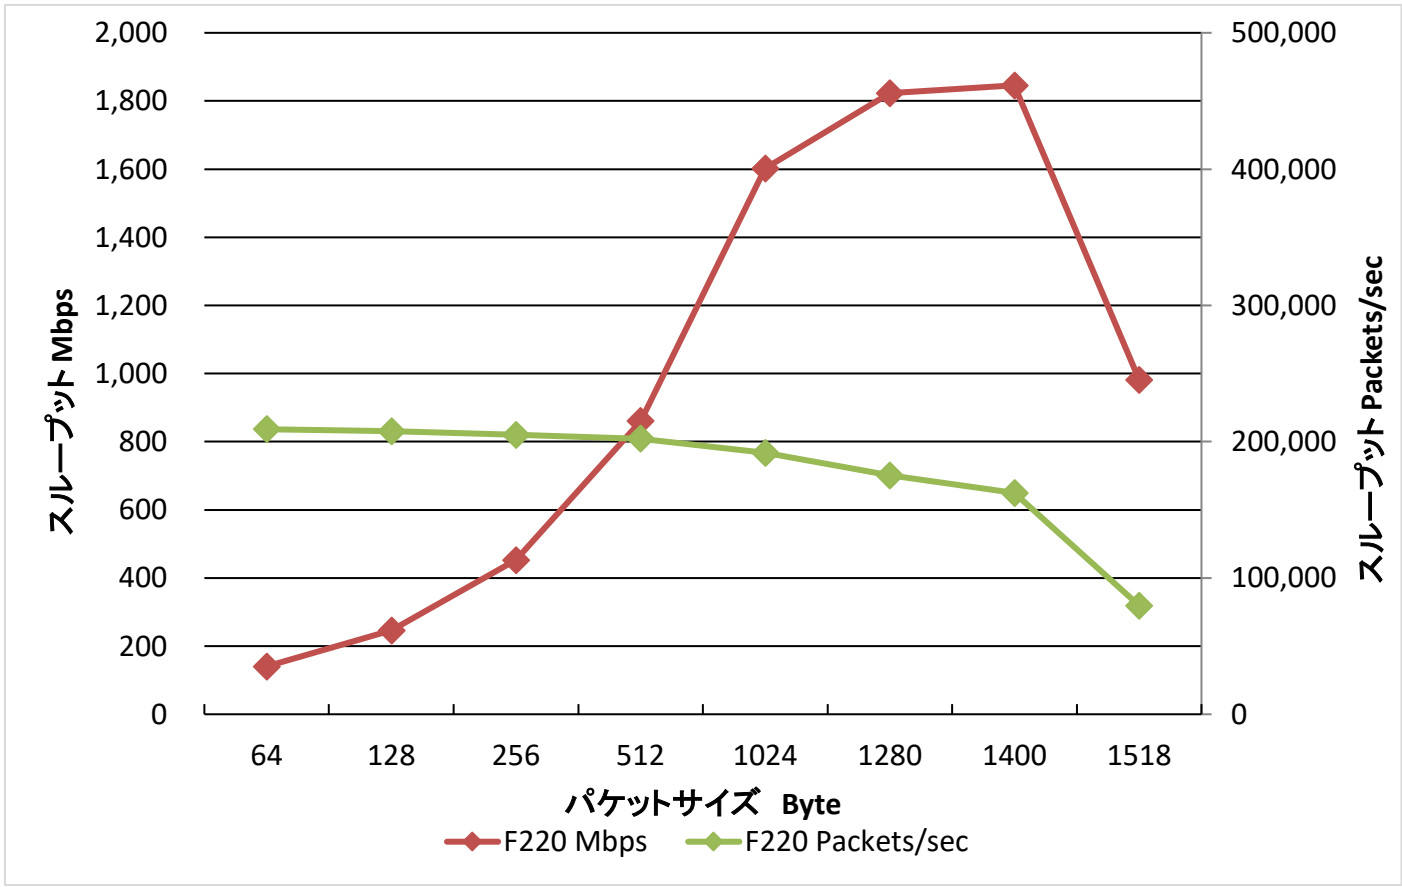

	測定フレームサイズ (bytes) ※最小値: 64bytes、フラグメント前の最大値: 1400bytes							
	64	128	256	512	1024	1280	1400	1518
Packets/sec	209,126.8	207,683.0	205,036.6	202,189.0	191,805.8	175,235.0	162,487.6	79,770.0
Mbps	140.5	245.9	452.7	860.5	1,602.0	1,822.4	1,845.9	981.5

L2TPv3 over IPsec中継: Ethernet over IPv4 over IPv6

回線速度: 1Gbps、双方向フロー印加
暗号化の条件: AES-256/SHA-1

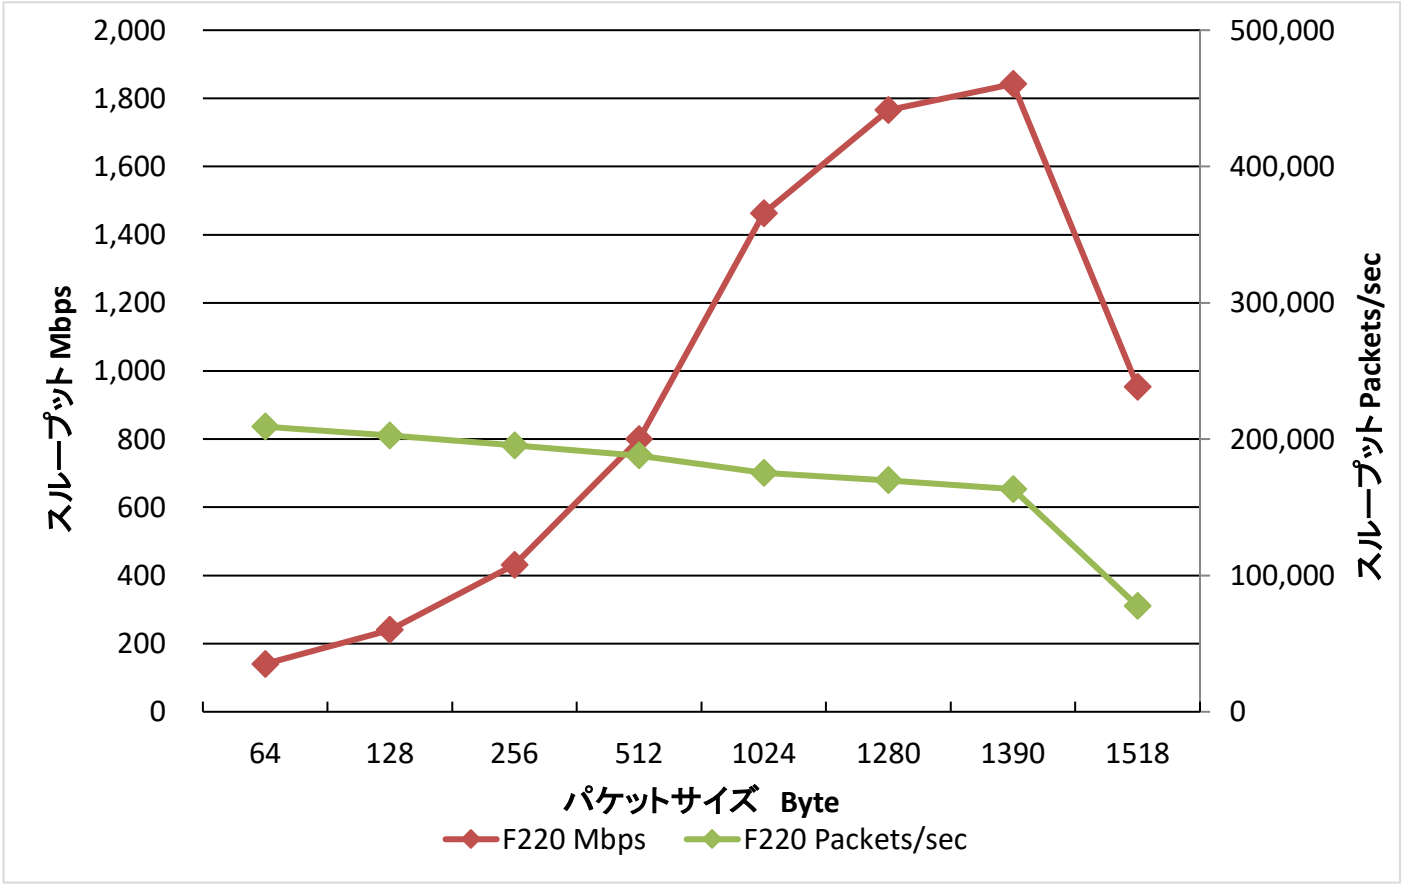

	測定フレームサイズ (bytes) ※最小値: 64bytes、フラグメント前の最大値: 1390bytes							
	64	128	256	512	1024	1280	1390	1518
Packets/sec	209,126.8	202,739.0	195,316.2	187,977.0	175,219.0	169,794.2	163,294.0	77,549.8
Mbps	140.5	240.0	431.3	800.0	1,463.4	1,765.9	1,842.0	954.2