


平文中継 (IPinIPトンネリング: IPv4 over IPv6)


回線速度: 1Gbps、双方向フロー印加

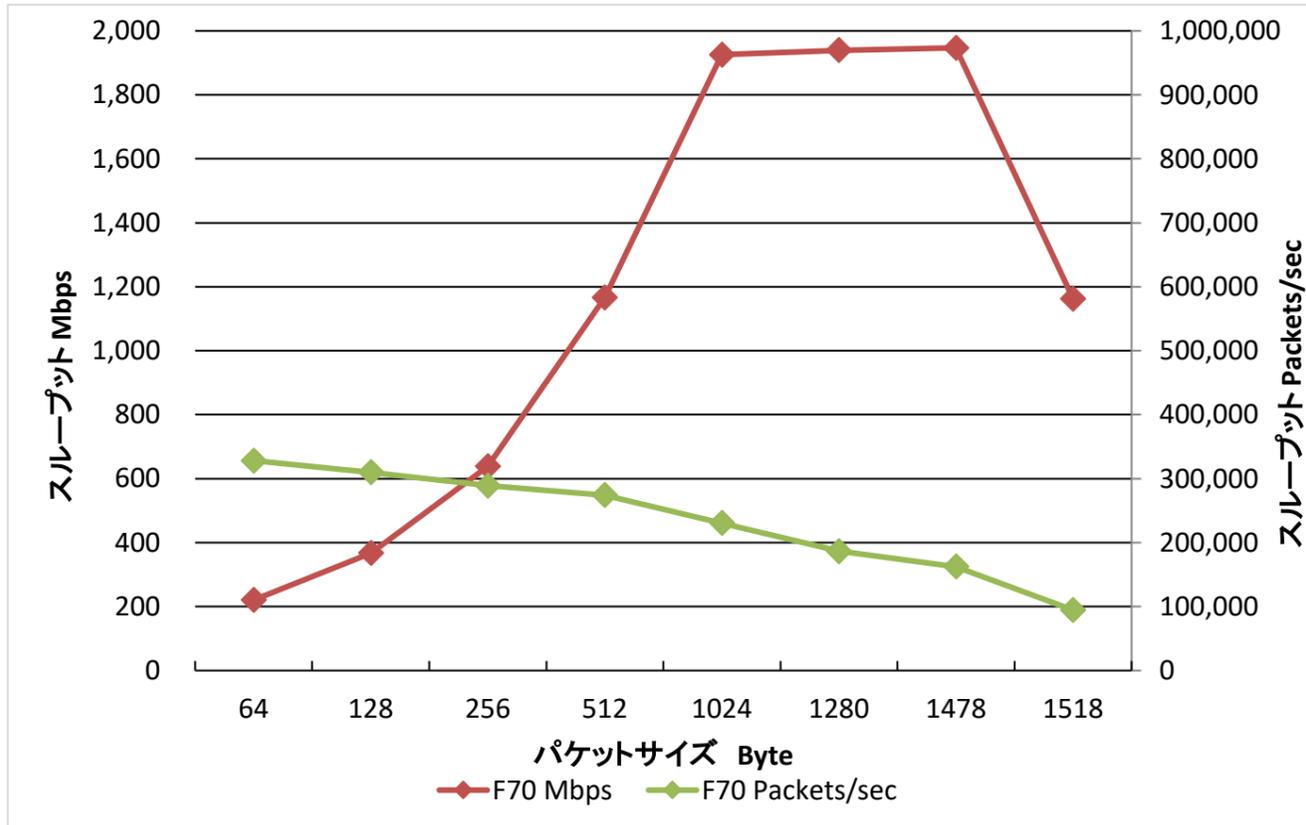

	測定フレームサイズ (bytes) ※最小値: 64bytes、フラグメント前の最大値: 1478bytes							
	64	128	256	512	1024	1280	1478	1518
Packets/sec	328,171.6	309,855.8	288,986.6	274,165.8	230,586.2	186,491.8	162,493.2	94,518.0
Mbps	220.5	366.9	638.1	1,166.8	1,925.9	1,939.5	1,947.3	1,162.9

平文中継 (EtherIPTunneling: Ethernet over IPv4 over IPv6)

回線速度: 1Gbps、双方向フロー印加

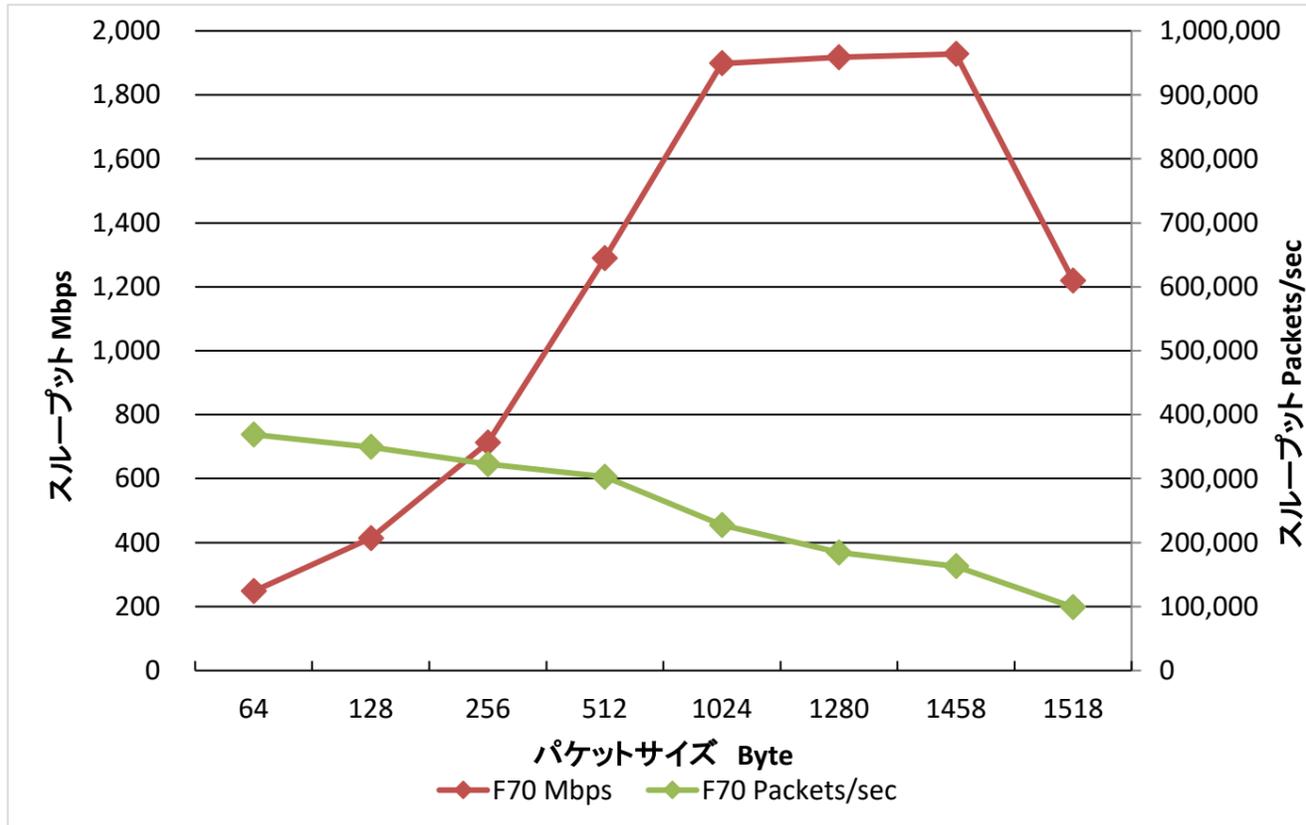


	測定フレームサイズ (bytes)							
	64	128	256	512	1024	1280	1458	1518
Packets/sec	368,821.0	349,406.6	322,566.4	303,048.4	227,315.6	184,428.0	163,042.0	99,116.8
Mbps	247.8	413.7	712.2	1,289.8	1,898.5	1,918.1	1,927.8	1,219.5

※最小値: 64bytes、フラグメント前の最大値: 1458bytes

平文中継 (L2TPv3トンネリング: Ethernet over IPv4 over IPv6)

回線速度: 1Gbps、双方向フロー印加

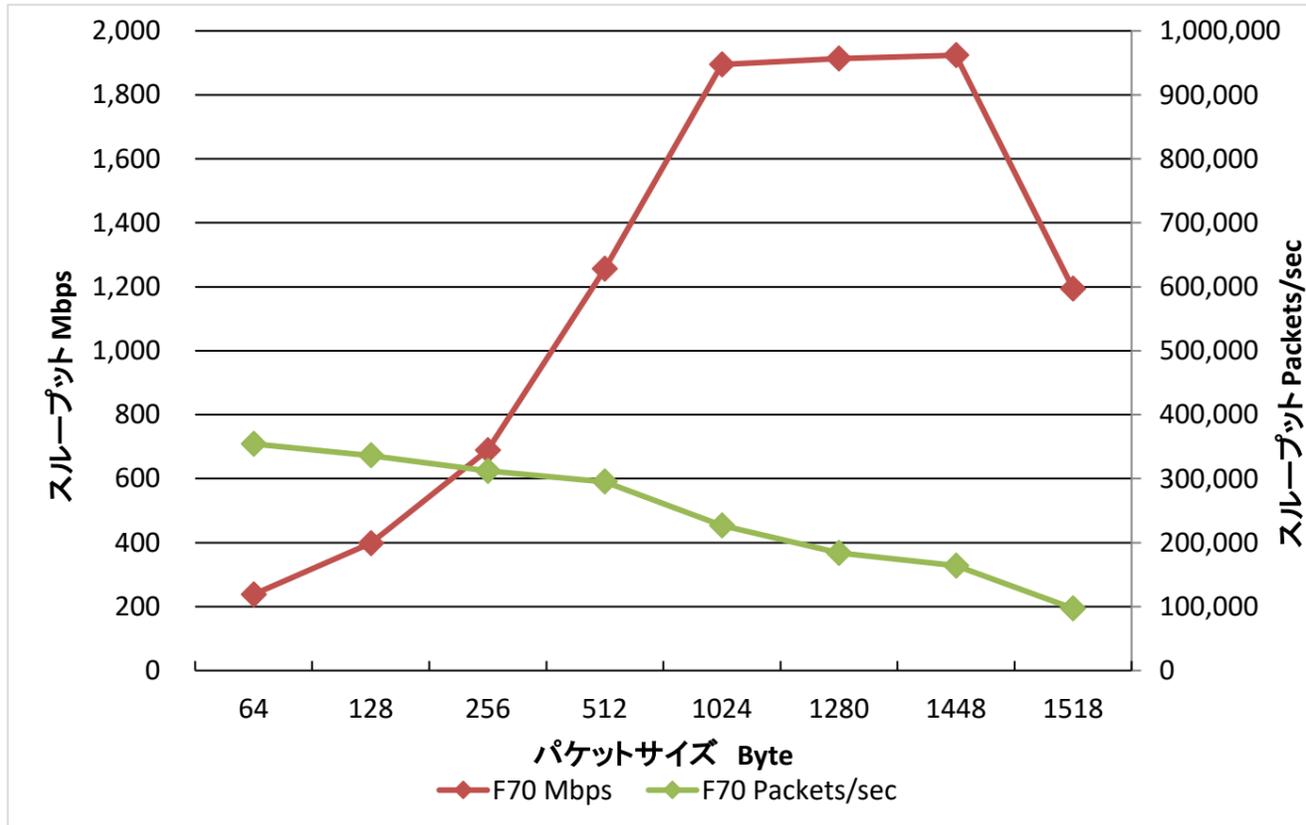

	測定フレームサイズ (bytes) ※最小値: 64bytes、フラグメント前の最大値: 1448bytes							
	64	128	256	512	1024	1280	1448	1518
Packets/sec	354,303.4	336,223.0	311,962.2	295,254.6	226,848.4	184,052.8	163,820.2	97,055.2
Mbps	238.1	398.1	688.8	1,256.6	1,894.6	1,914.1	1,923.9	1,194.2