


IPsec中継: IPv4 over IPv6


回線速度: 1Gbps、双方向フロー印加  
暗号化の条件: AES-256/SHA-1

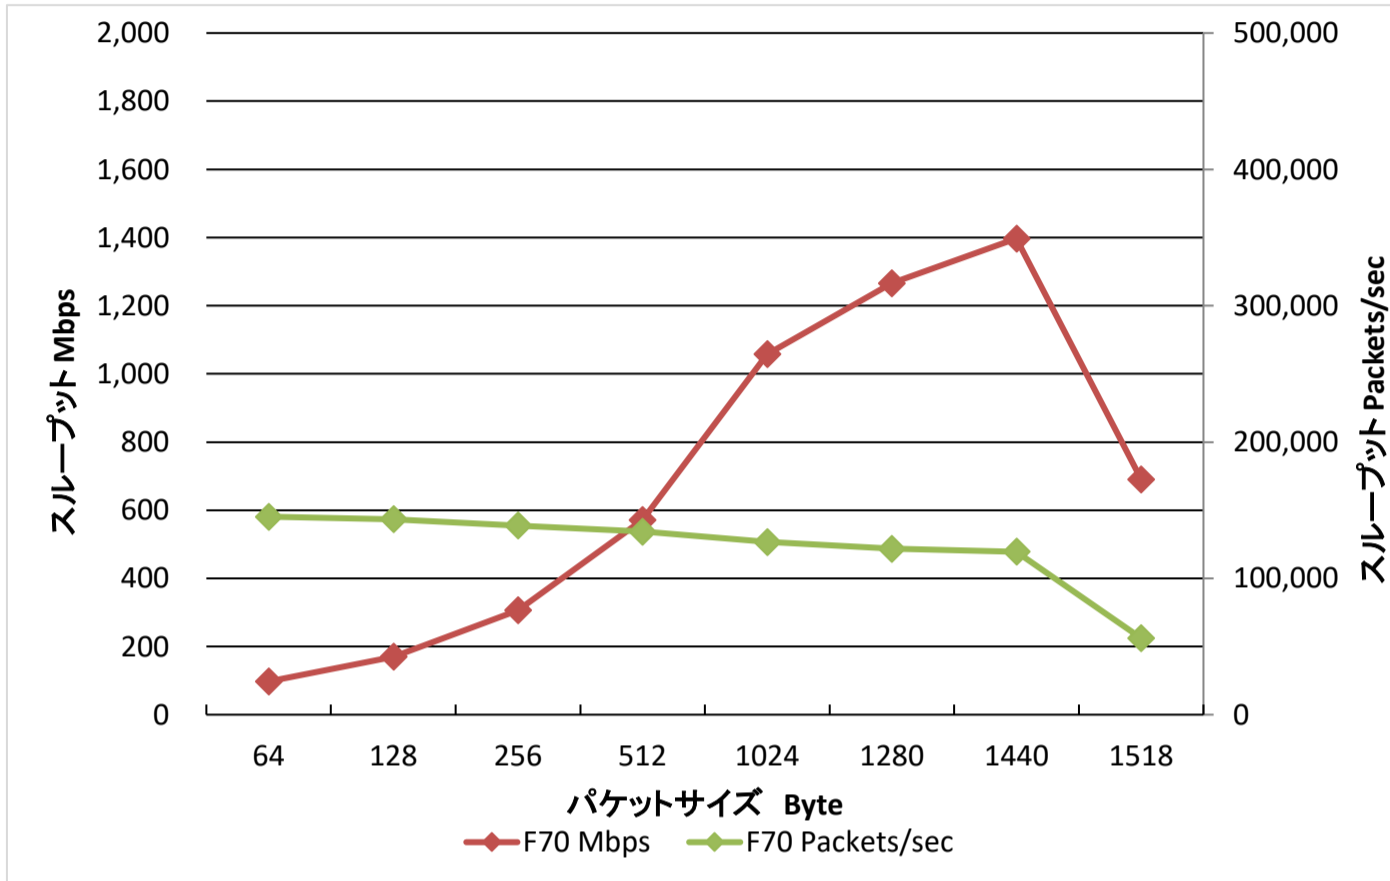

	測定フレームサイズ (bytes) ※最小値: 64bytes、フラグメント前の最大値: 1440bytes							
	64	128	256	512	1024	1280	1440	1518
Packets/sec	145,249.2	143,413.0	138,760.4	134,338.0	126,626.6	121,765.4	119,613.8	56,141.4
Mbps	97.6	169.8	306.4	571.7	1,057.6	1,266.4	1,397.1	690.8

**EtherIP over IPsec中継: Ethernet over IPv4 over IPv6**


回線速度: 1Gbps、双方向フロー印加  
 暗号化の条件: AES-256/SHA-1

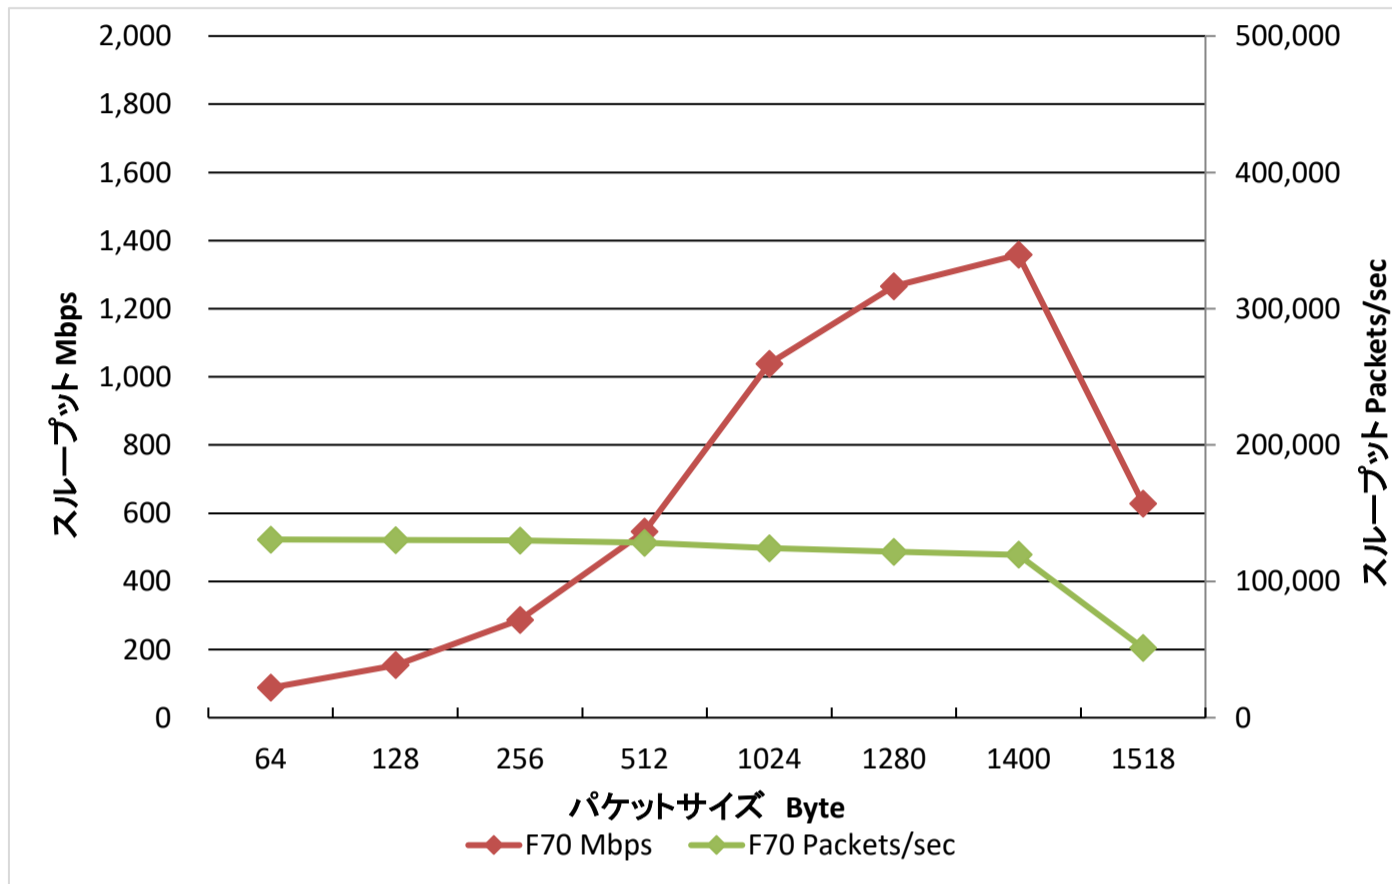

	測定フレームサイズ (bytes)							
	※最小値: 64bytes、フラグメント前の最大値: 1400bytes							
	64	128	256	512	1024	1280	1400	1518
Packets/sec	130,731.6	130,229.4	129,923.6	128,378.2	124,290.4	121,765.4	119,548.0	51,067.0
Mbps	87.9	154.2	286.9	546.4	1,038.1	1,266.4	1,358.1	628.3

L2TPv3 over IPsec中継: Ethernet over IPv4 over IPv6

回線速度: 1Gbps、双方向フロー印加  
 暗号化の条件: AES-256/SHA-1

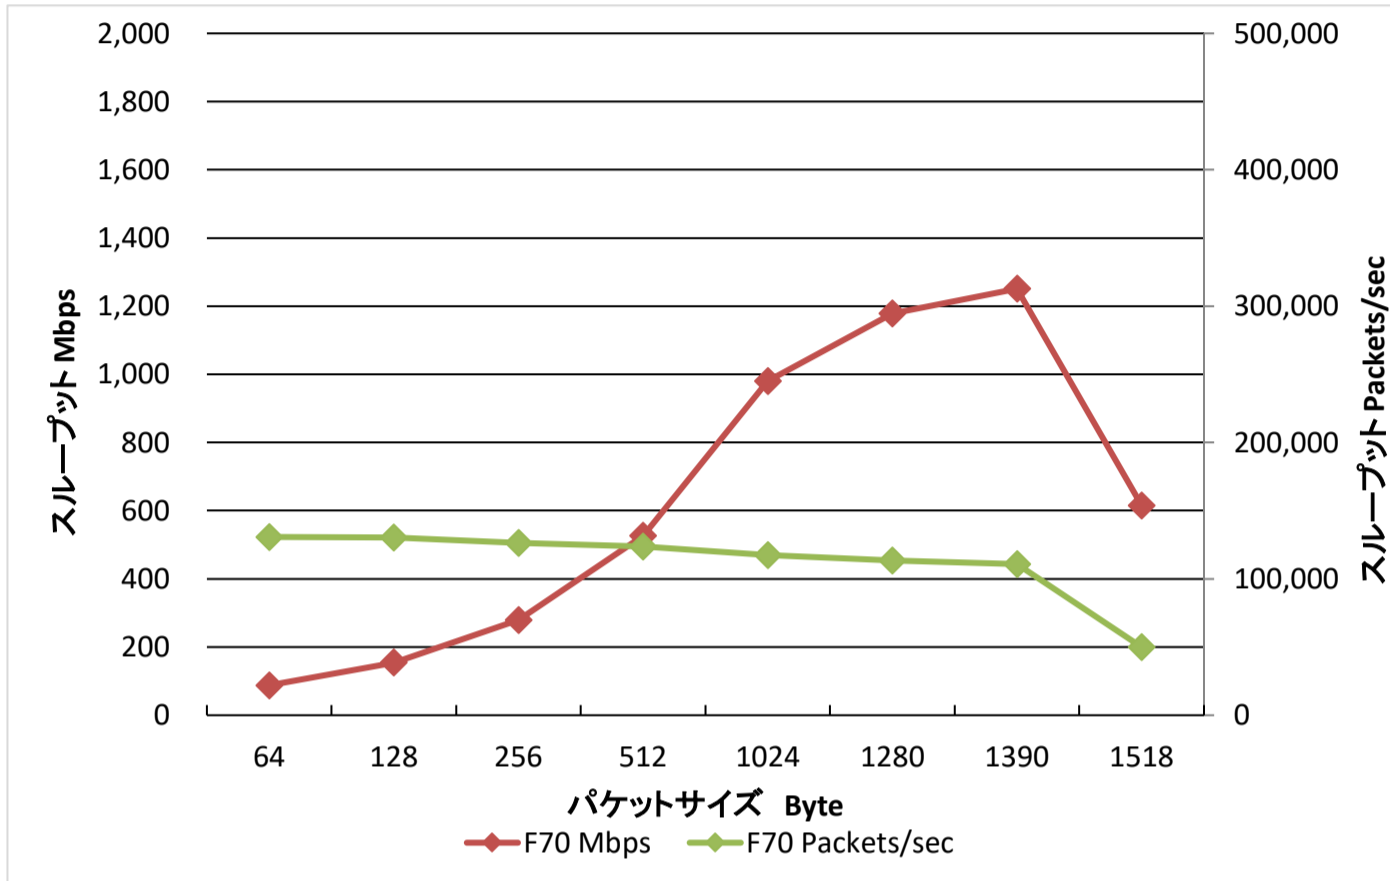

	測定フレームサイズ (bytes) ※最小値: 64bytes、フラグメント前の最大値: 1390bytes							
	64	128	256	512	1024	1280	1390	1518
Packets/sec	130,731.6	130,229.4	126,388.8	123,793.6	117,281.8	113,322.8	110,882.2	49,956.8
Mbps	87.9	154.2	279.1	526.9	979.5	1,178.6	1,250.8	614.7