


平文中継 (IPinIPトンネリング: IPv4 over IPv6)

回線速度: 1Gbps、双方向フロー印加

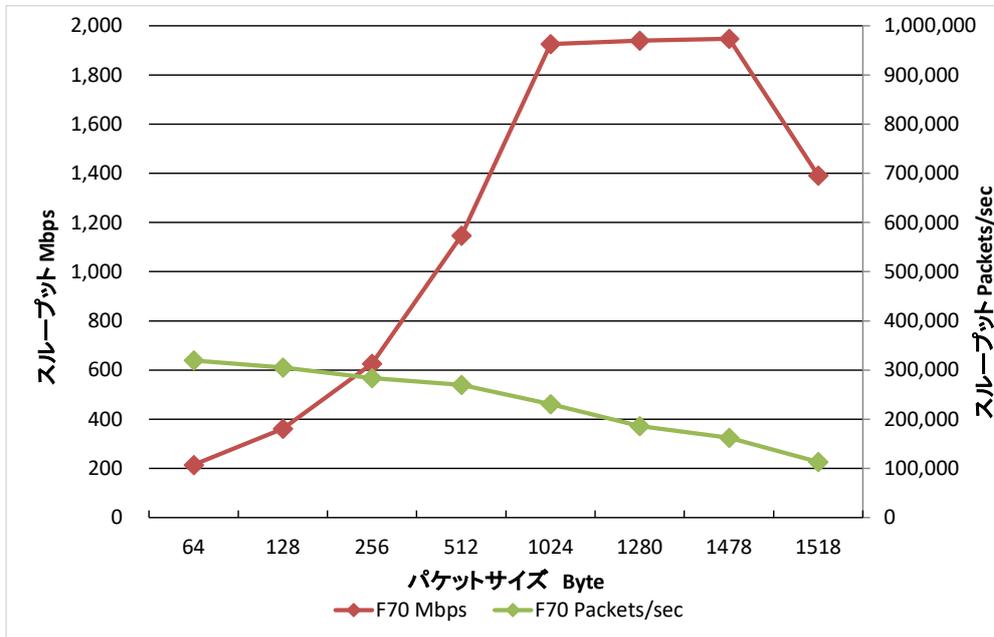


	測定フレームサイズ (bytes)							
	64	128	256	512	1024	1280	1478	1518
Packets/sec	319,461.0	304,912.0	283,684.4	269,581.4	230,586.2	186,491.8	162,493.2	113,071.8
Mbps	214.7	361.0	626.4	1,147.3	1,925.9	1,939.5	1,947.3	1,391.2

※最小値: 64bytes、フラグメント前の最大値: 1478bytes

平文中継 (EtherIPトンネリング: Ethernet over IPv4 over IPv6)

回線速度: 1Gbps、双方向フロー印加

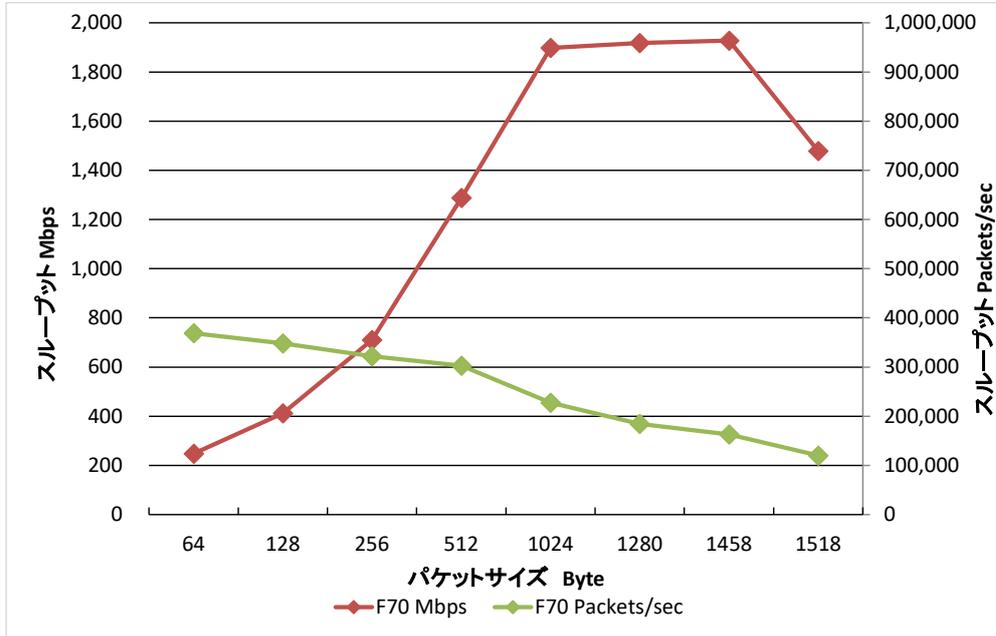


	測定フレームサイズ (bytes)							
	64	128	256	512	1024	1280	1458	1518
Packets/sec	368,821.0	347,758.6	321,682.8	302,590.0	227,315.6	184,428.0	163,042.0	120,208.0
Mbps	247.8	411.7	710.3	1,287.8	1,898.5	1,918.1	1,927.8	1,479.0

※最小値: 64bytes、フラグメント前の最大値: 1458bytes

平文中継 (L2TPv3トンネリング: Ethernet over IPv4 over IPv6)

回線速度: 1Gbps、双方向フロー印加

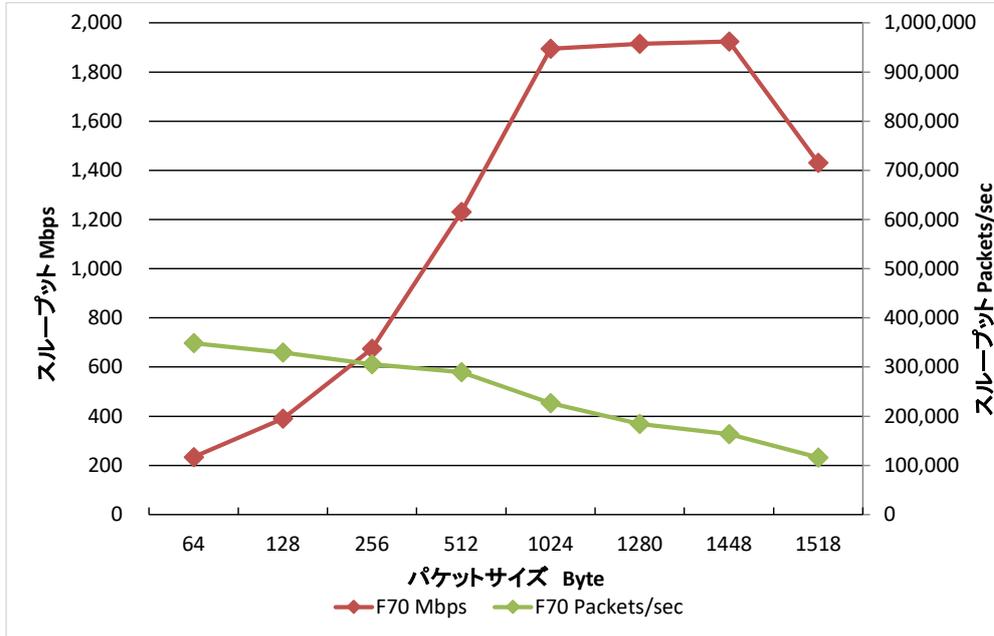

	測定フレームサイズ (bytes)							
	64	128	256	512	1024	1280	1448	1518
Packets/sec	348,496.2	329,631.2	305,776.6	289,294.8	226,848.4	184,052.8	163,820.2	116,243.4
Mbps	234.2	390.3	675.2	1,231.2	1,894.6	1,914.1	1,923.9	1,430.3

※最小値: 64bytes、フラグメント前の最大値: 1448bytes