



Splicing Box – J418 SC

The small connector rosette for Single Family Unit (SFU).

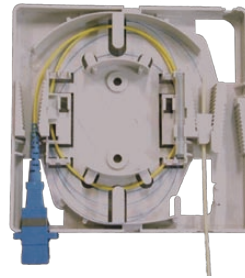

J418 SC connector rosette

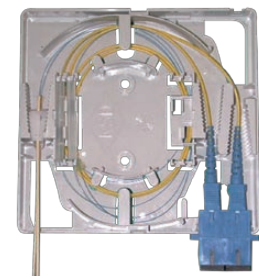

J418 SCx2 connector rosette

Features and Benefits

J418 SC connector rosette

- Indoor application (Flame retardant material)
- Wall mount type
- Compact size: W120×H115×D16 mm
- Light weight by plastic body and cover
- Max. fusion splice: 1-fiber
- Adapter type: SC/PC or SC/APC


J418 SCx2 connector rosette

- Indoor application (Flame retardant material)
- Wall mount type
- Compact size: W120×H115×D16 mm
- Light weight by plastic body and cover
- Max. fusion splice: 2-fibers
- Adapter type: dSC/PC or dSC/APC


Specification

| Item | | Specification | |
|--------------------------|--|--|-----------|
| Product name | | J418 SC | J418 SCx2 |
| Dimension (W×H×D mm) | | 120×115×16 | |
| Weight (kg) | | 0.2 | |
| Flame retardance | | Cover: UL94, HB Main body: UL94, HB Cable clamp: UL94, V-0 | |
| Mount condition | | Indoor wall mount type | |
| Cable entry position | | Bottom | |
| Max. cable count/side | Drop cable (W2.0) or Indoor cable (W2.0) or Optical cord (φ 2.0 mm or φ1.5 mm) | 1 | 2 |
| Max. fiber fusion splice | | 1 | 2 |
| Max. SC connector joint | | 1 | 2 |

Wiring Diagram



J418 SC

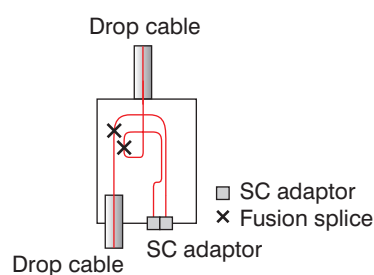

J418 SCx2