


Aerial Closure J398

The J398 closure is for aerial application with 640 fiber splice capability. Combination with drop cable and splitter realizes the FTTH mass rollout.

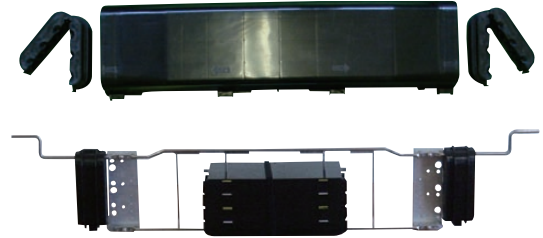


Features and Benefits

- Up to 640 fiber splicing
- Suitable for drop cable installation
- Allows accommodating splitter
- Ease of installation
- Allows entry for various type of cable
- Mid-span access
- Small size and light weight

Specification

Item		Specification		Remark
Product name		J398		
Product No.		J398<COM-S><640>		
Dimension (H×W×L mm)		150×193×772		—
Weight (kg)		5.0		—
Water proof		IPX4		—
Environmental condition		Temperature: -20 to +60°C Humidity: 0 to 100%RH		—
Max. cable entry	Main cable	φ 8-24 mm	3 cables/side	φ 8~φ 24 mm
	Drop cable	Max. 2.0×3.5 mm	8 cables/entry	1 main cable could be replaced with 8 drop cables (Up to 2 main cables/side)
Max. fiber splices	Single fiber		—	—
	2-fiber ribbon		—	—
	4-fiber ribbon		640	20 splices/tray
	8-fiber ribbon		640	10 splices/tray
Applicable splitter		1×4, 1×8		—

Installation

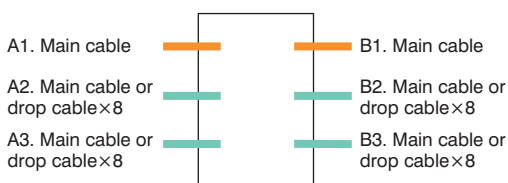

Position	Applicable cable type	Position	Applicable cable type
A1	Main cable	B1	Main cable
A2	Main cable or drop cable×8	B2	Main cable or drop cable×8
A3	Main cable or drop cable×8	B3	Main cable or drop cable×8