


# Aerial Closure J395L

The J395L closure is for aerial application, especially for distribution point. Combination with 1×4 or 1×8 splitter and fiber cable realize simple FTTx network construction.

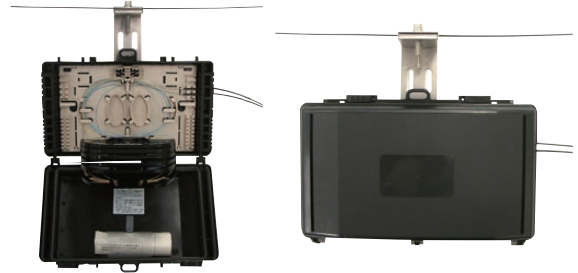


## Features and Benefits

- Small size and light weight
- Suitable for drop cable and indoor cable distribution
- Enables simple FTTx network construction
- Allows accommodating 1×4 or 1×8 splitter
- 2 SC connections are available


## Specification

Item		Specification	Remark
Product name		Drop distribution box	
Product No.		J395L	
Dimension (H×W×L mm)		140×56×242	—
Weight (kg)		1.0	—
Water proof		IPX4	—
Environmental condition		Temperature: -20 to +60°C Humidity: 0 to 100%RH	—
Max. cable entry	Main drop cable	2 cable/side	Thickness of drop cable: 2.0 or 3.3 mm
	Drop cable/Indoor cable	8 cables/side	Thickness of drop cable: 2.0 mm Thickness of indoor cable: 2.0 or 2.5 mm
Max. fiber splices	Single fiber	12	—
	2-fiber ribbon	24	—
	4-fiber ribbon	24	—
	8-fiber ribbon	—	—
Applicable splitter		1×4, 1×8	—


## Installation

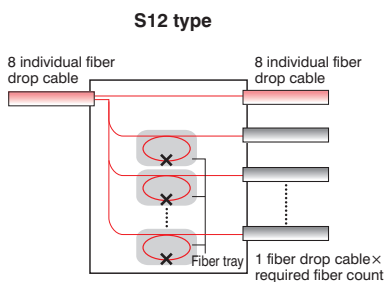

An 8 individual fiber drop cable will be spliced to several 1 fiber drop cables. Remaining fiber will be spliced at the next branching point.

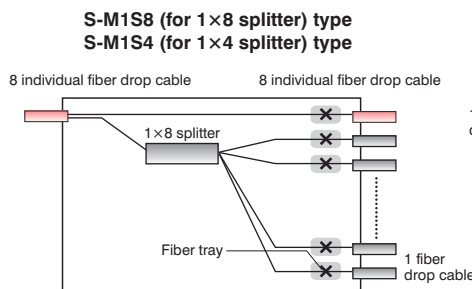

One fiber from the 8 individual fiber drop cable will be spliced with either 1×4 or 1×8 splitters and remaining fiber will be spliced at the next branching point. After the splitter, it will be spliced with an 1 fiber drop cable.

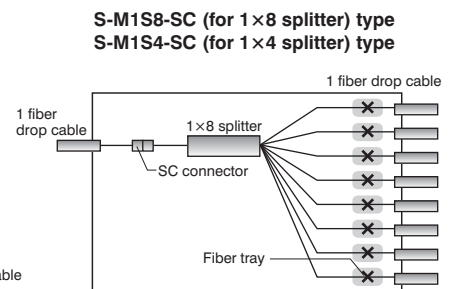

The 1 fiber drop cable will be connected with either 1×4 or 1×8 splitter by SC connector. After the splitter, it will be spliced with an 1 fiber drop cable.