


IPsec中継: IPv4 over IPv4


回線速度: 1Gbps、双方向フロー印加
暗号化の条件: AES-256/SHA-1

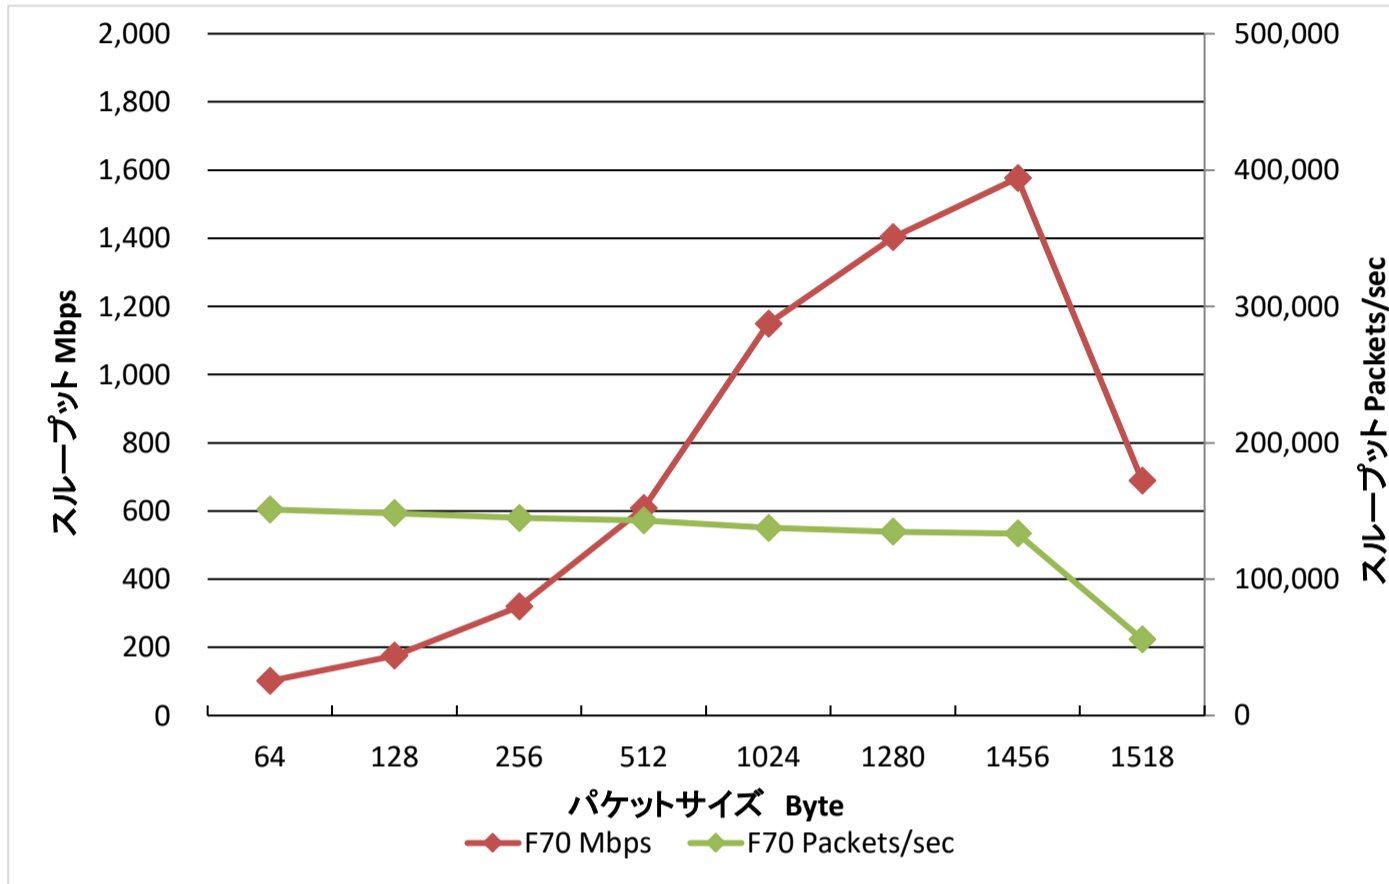

	測定フレームサイズ (bytes) ※最小値: 64bytes、フラグメント前の最大値: 1456bytes							
	64	128	256	512	1024	1280	1456	1518
Packets/sec	151,056.2	148,356.8	144,946.2	143,048.6	137,606.6	134,898.4	133,519.4	55,983.0
Mbps	101.5	175.7	320.0	608.8	1,149.3	1,402.9	1,576.6	688.8

IPinIP over IPsec中継: IPv4 over IPv4 over IPv4


回線速度: 1Gbps、双方向フロー印加
 暗号化の条件: AES-256/SHA-1

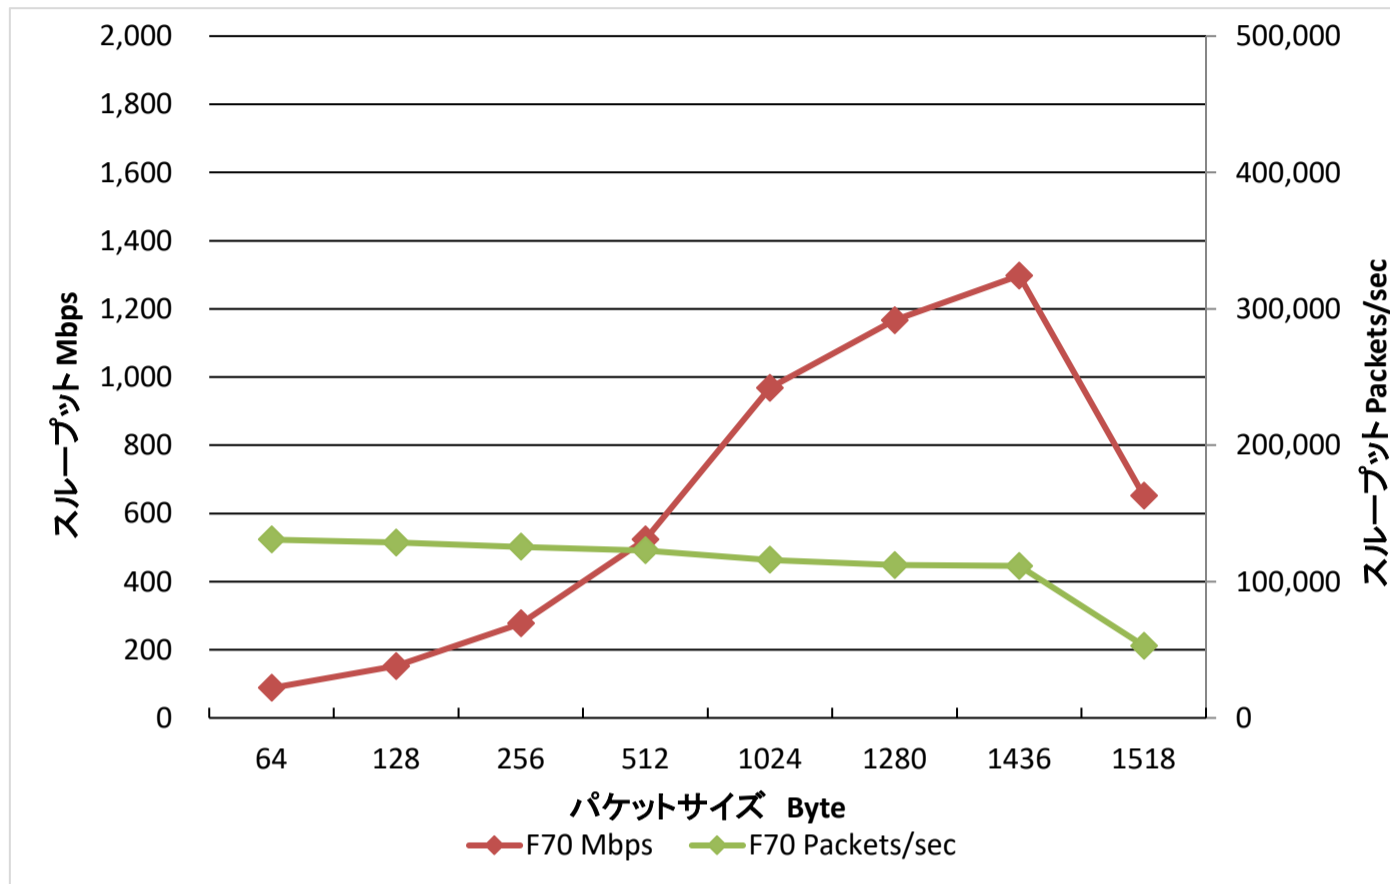

	測定フレームサイズ (bytes) ※最小値: 64bytes、フラグメント前の最大値: 1436bytes							
	64	128	256	512	1024	1280	1436	1518
Packets/sec	130,731.6	128,581.4	125,505.2	122,876.8	115,880.2	112,197.2	111,399.4	52,969.8
Mbps	87.9	152.2	277.1	523.0	967.8	1,166.9	1,297.6	651.7

EtherIP over IPsec中継: Ethernet over IPv4 over IPv4

回線速度: 1Gbps、双方向フロー印加
 暗号化の条件: AES-256/SHA-1

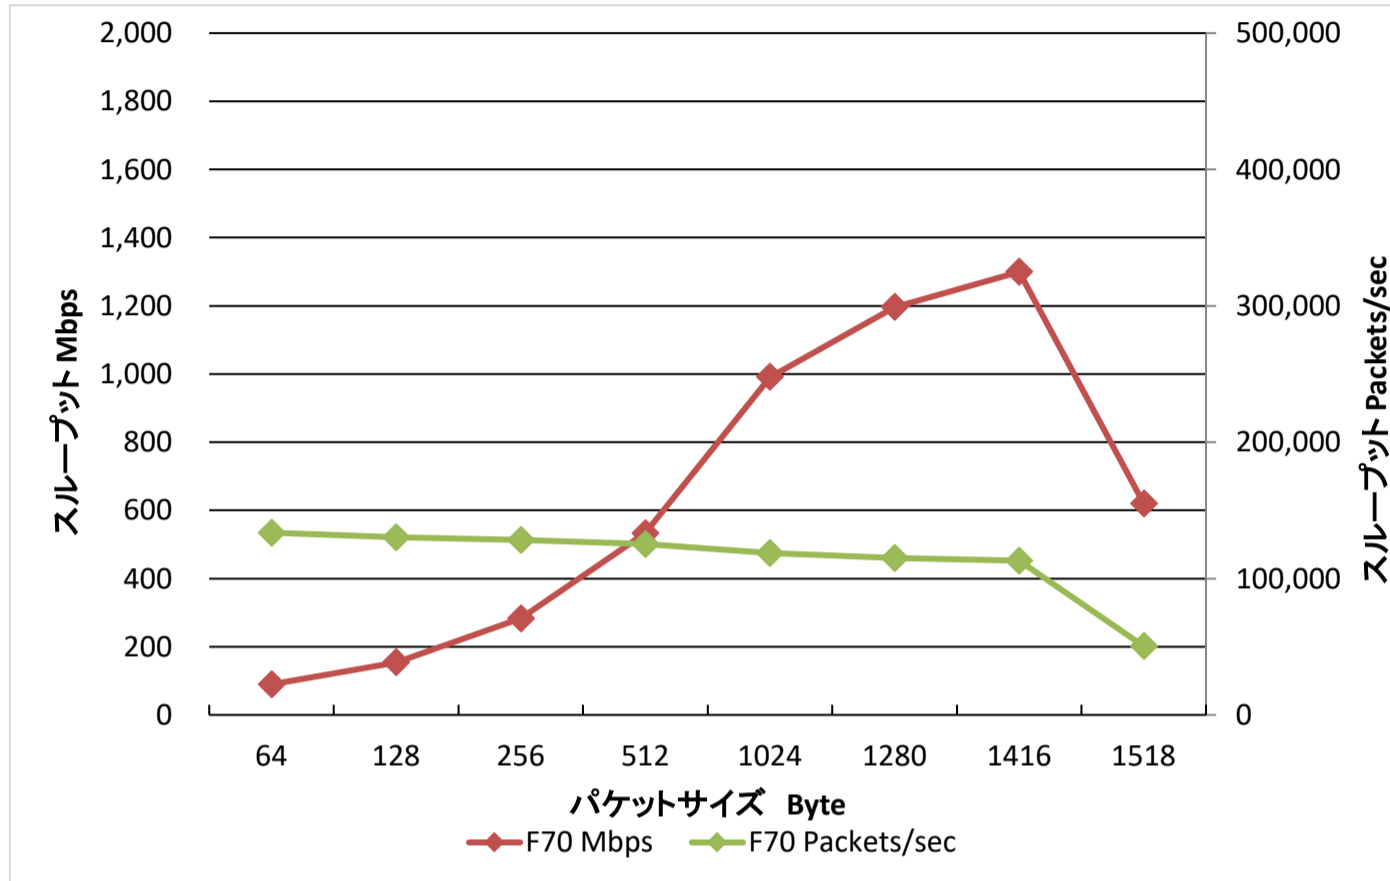


	測定フレームサイズ (bytes)							
	64	128	256	512	1024	1280	1416	1518
Packets/sec	133,635.2	130,229.4	128,156.2	125,169.0	118,683.6	115,011.4	113,120.6	50,432.6
Mbps	89.8	154.2	283.0	532.7	991.2	1,196.1	1,299.5	620.5

※最小値: 64bytes、フラグメント前の最大値: 1416bytes

L2TPv3 over IPsec中継: Ethernet over IPv4 over IPv4

回線速度: 1Gbps、双方向フロー印加
 暗号化の条件: AES-256/SHA-1

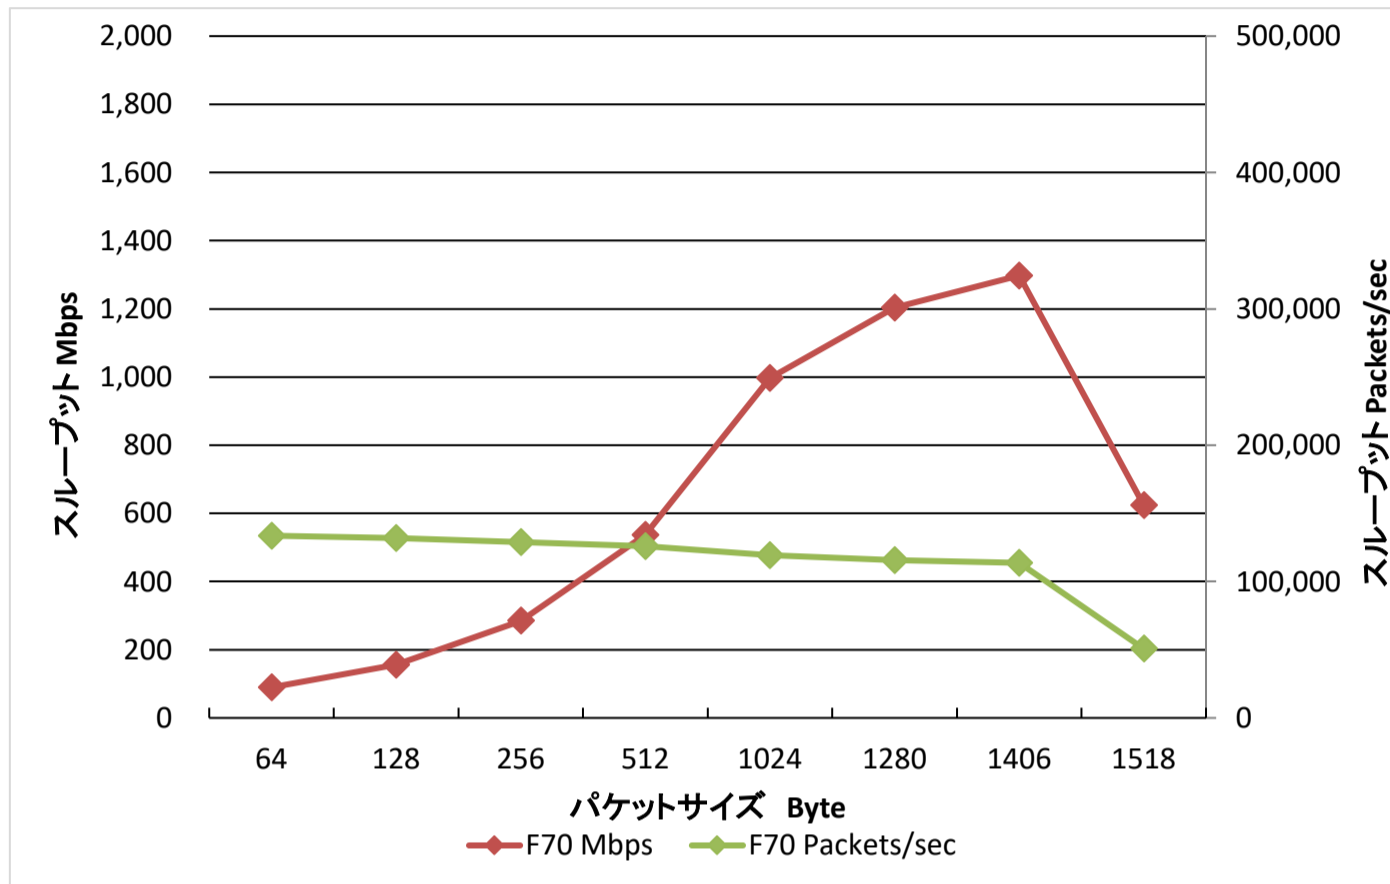

	測定フレームサイズ (bytes)							
	※最小値: 64bytes、フラグメント前の最大値: 1406bytes							
	64	128	256	512	1024	1280	1406	1518
Packets/sec	133,635.2	131,877.2	129,040.0	126,085.8	119,384.4	115,761.8	113,743.0	50,749.8
Mbps	89.8	156.1	284.9	536.6	997.1	1,203.9	1,297.6	624.4